




Specification Decorative Discus™ 6706MS22U

Page 1 of 1

Ceiling or "ADA" Wall Mounted Compact Fluorescent 1 Lt. 22W

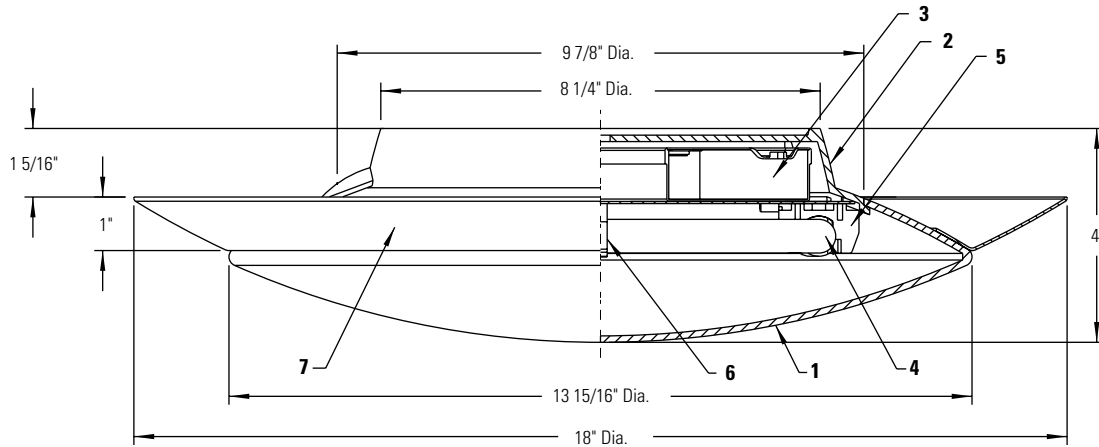

Ordering Information

Cat. No.	Finish	Wattage.	Voltage	Lamping	
6706MS22U	Matte Silver	22W	120V-277V	Philips FC9T5/*	Osram/Sylvania FPC22/*

*Designates manufacturer's color temperature.

Features

- 1. Diffuser:** Acrylic, injection molded and bonded into one piece assembly; 0.12" minimum thickness; 70% light transmission. Lights evenly without discernible hot spots. Integral tabs provide "twist-lock" installation; no loose hardware, no tools required.
- 2. Housing:** Polycarbonate, injection molded. Shatter resistant. Integral bosses retain diffuser without loose hardware.
- 3. Ballast:** Electronic; High power factor; Class P. See Electrical/Ballast.
- 4. Lamp:** 22W, T5, Circline; 2GX13 base (by others).
- 5. Lamp Socket:** Polycarbonate, 4-Pin, 2GX13 base.
- 6. Lamp Support Clip:** .020" thick, spring steel.
- 7. Trim Ring:** 16 gauge die formed aluminum. Brushed aluminum finish.

Mounting

Ceiling or wall (ADA compliant). Mounts to standard 4" outlet box.

Options

- + Shatter resistant polycarbonate diffuser. Add TP to end of catalog number.
- + Designates made to order only. Consult factory for lead times.

Electrical/Ballast

	22W Lamp	
	120v	277V
Total Input Watts:	25	25
Max. Line Current:	.22	.10
Power Factor:	>.98	>.98
Ballast Factor:	1.00	1.00
THD:	<10%	<10%
Starting Temp:	0°F	0°F

Labels

UL Listed, Suitable for Damp Locations.

Job Information

Type:

Job Name:

Cat. No.:

Lamp(s):

Notes:

Lightolier a Genlyte Thomas Company
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902

www.lightolier.com

LIGHTOLIER®